


G ; 2+ ; Valide


MATERIAL:
 Body : Polyamid UL94 V-0
 Elastomer link: Elastomer
 Eyelet : brass tin plated
NOTES :
 -Operating temperature : -40° up to +105°
 -This cap is a water and dust protected version.
 -Level sealing : IP68 (1bar during 1 week)
 -Pull out force of the crimped eyelet on the elastomer link : 10 N mini.

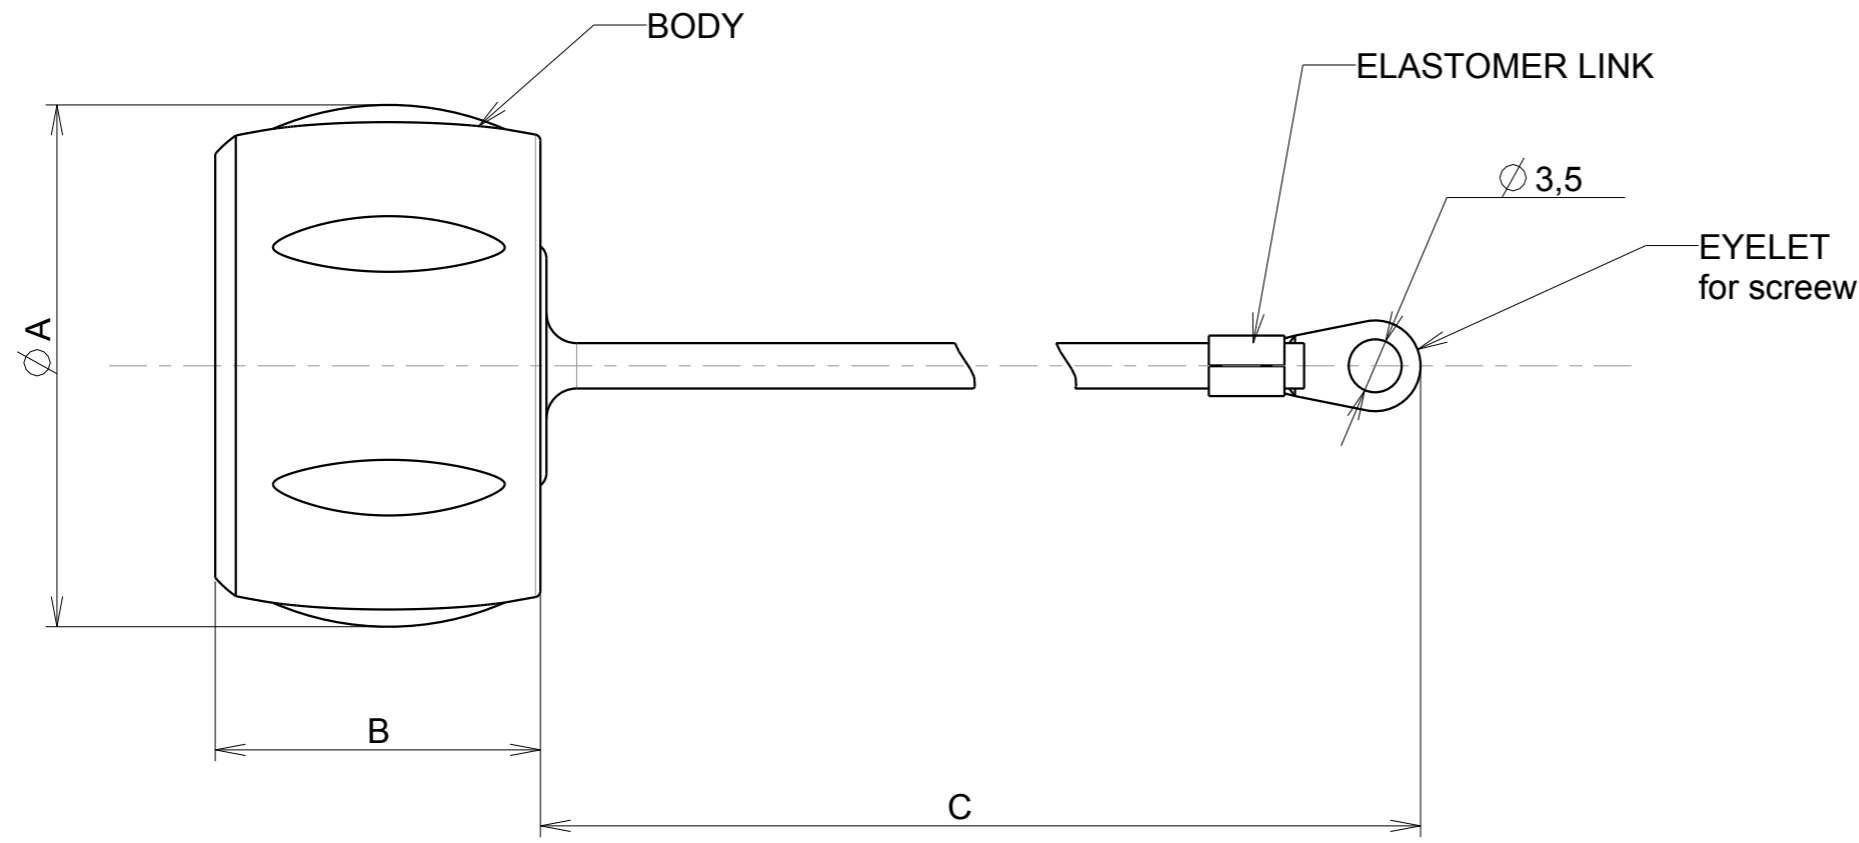

PART NUMBER	Ø A	B	C ⁺⁰ ₋₆
UTS8DCGE	22.50	16.50	89
UTS10DCGE	26.20	18.40	108
UTS12DCGE	29.70	19.60	108
UTS14DCGE	34.60	21.50	105
UTS18DCGE	42	23	105

Country	Jurisdiction & Control List
FR	NOT LISTED

P/N : UTSXXDCGE

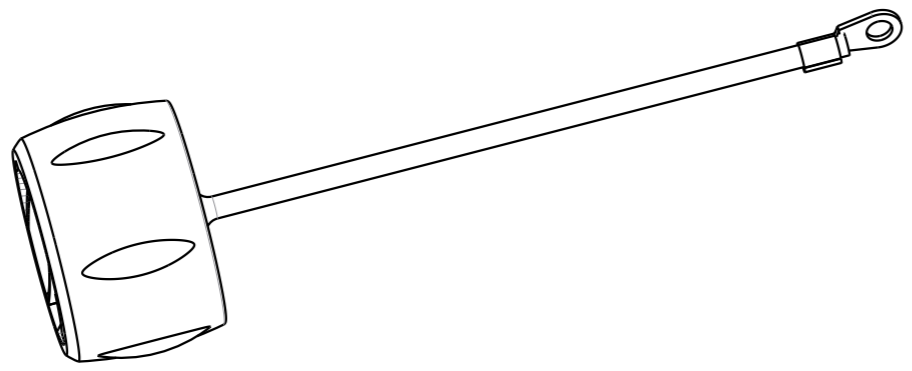

G	19/03/2018	Change dimension C		--
ISS	DATE	Latest modification - by: ROUILLARD Ch		MOD N°
Designed by: ROUILLARD		Date: 22/01/09	CUSTOMER DRAWING	
TITLE		UTS RECEPTACLE SEALING CAP WITH SMALL EYELET FOR SQUARE FLANGE RECEPTACLE		
Scale	2/1	General linear Tolerances: ± 0.4	NPRDS / PROJECT UTS1	
SOURIAU		WWW.SOURIAU.COM		This document is the property of SOURIAU It must not be reproduced or communicated without permission
FORMAT	A3	SOURIAU DRG N° C075-UTS1-A		SHEET 1 / 1